



Cilindro Elettronico Modulare
Electronic Modular Cylinder



VIDEO



Apertura con smartphone e transponder.

Non necessita di cablaggi.

- > Pomolo esterno azionabile manualmente
- > Compatibile con serratura a cilindro europeo
- > 2 Batterie al litio tipo CR- 2
- > Autonomia circa 2 anni (10 aperture/giorno).

Avviso batteria scarica

- > Retroilluminazione a LED
- > Tecnologia contactless Mifare Classic
- > Campo di lettura < 20 mm
- > Capacità fino a 150 utenti

Applicazione: interni/esterni IP65

Temperatura di utilizzo: da -20°C a + 65°C

Opening with smartphone and transponder.

Without cables.

- > External knob, manually operated
- > Compatible with European cylinder lock
- > 2 CR-2 lithium batteries
- > Battery life: approximately 2 years (10 openings per day).

Low battery warning

- > LED backlight
- > Technology contactless Mifare Classic
- > Reading range < 20 mm
- > Capacity maximum 150 keys




Usage: indoor/outdoor IP65

Operating temperature: from -20°C to + 65°C

EQUIPMENT



OPTIONAL

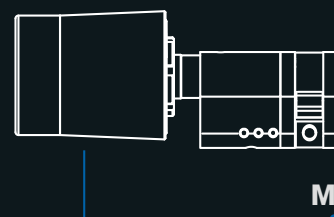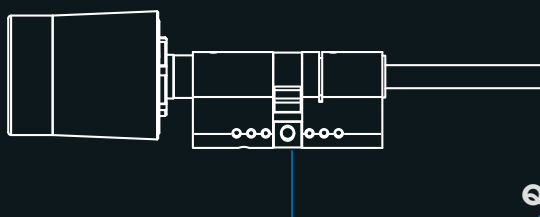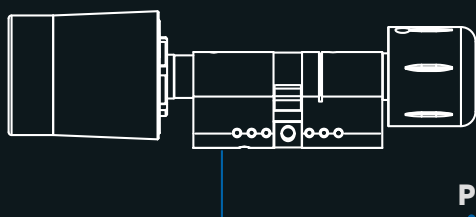

INSTRUCTIONS



TEST STANDARD: EN15684

