

Serie Line	Finitura cromo satinato Chromium satin finishing	A	B	C		
3500-M	3500MCS30101X3	41	31	10	5-25	
3500-M	3500MCS35101X3	46	36	10	5-25	
3500-M	3500MCS40101X3	51	41	10	5-25	
3500-M	3500MCS45101X3	56	46	10	5-25	
3500-M	3500MCS50101X3	61	51	10	5-25	
3500-C	3500CCS30301X3	62	31	31	5-25	 
3500-C	3500CCS30351X3	67	31	36	5-25	
3500-C	3500CCS30401X3	72	31	41	5-25	
3500-C	3500CCS35351X3	72	36	36	5-25	
3500-C	3500CCS30451X3	77	31	46	5-25	
3500-C	3500CCS35401X3	77	36	41	5-25	
3500-C	3500CCS30501X3	82	31	51	5-25	
3500-C	3500CCS35451X3	82	36	46	5-25	
3500-C	3500CCS40401X3	82	41	41	5-25	
3500-C	3500CCS30551X3	87	31	56	5-25	
3500-C	3500CCS35501X3	87	36	51	5-25	
3500-C	3500CCS40451X3	87	41	46	5-25	
3500-C	3500CCS30601X3	92	31	61	5-25	
3500-C	3500CCS35551X3	92	36	56	5-25	
3500-C	3500CCS40501X3	92	41	51	5-25	
3500-C	3500CCS45451X3	92	46	46	5-25	
3500-C	3500CCS35601X3	97	36	61	5-25	
3500-C	3500CCS40551X3	97	41	56	5-25	
3500-C	3500CCS45501X3	97	46	51	5-25	
3500-C	3500CCS30701X3	102	31	71	5-25	
3500-C	3500CCS40601X3	102	41	61	5-25	
3500-C	3500CCS50501X3	102	51	51	5-25	
3500-C	3500CCS30801X3	112	31	81	5-25	
3500-C	3500CCS40701X3	112	41	71	5-25	
3500-C	3500CCS50601X3	112	51	61	5-25	
3500-C	3500CCS50701X3	122	51	71	5-25	
3500-P	3500PCS30301X3	62	31	31	5-25	 
3500-P	3500PCS35301X3	67	36	31	5-25	
3500-P	3500PCS40301X3	72	41	31	5-25	
3500-P	3500PCS35351X3	72	36	36	5-25	
3500-P	3500PCS45301X3	77	46	31	5-25	
3500-P	3500PCS40351X3	77	41	36	5-25	
3500-P	3500PCS35401X3	77	36	41	5-25	
3500-P	3500PCS50301X3	82	51	31	5-25	
3500-P	3500PCS45351X3	82	46	36	5-25	
3500-P	3500PCS35451X3	82	36	46	5-25	
3500-P	3500PCS40401X3	82	41	41	5-25	
3500-P	3500PCS40451X3	87	41	46	5-25	
3500-P	3500PCS60301X3	92	61	31	5-25	
3500-P	3500PCS55351X3	92	56	36	5-25	
3500-P	3500PCS50401X3	92	51	41	5-25	
3500-P	3500PCS45451X3	92	46	46	5-25	
3500-P	3500PCS40501X3	92	41	51	5-25	
3500-P	3500PCS50451X3	97	51	46	5-25	
3500-P	3500PCS60401X3	102	61	41	5-25	
3500-P	3500PCS50501X3	102	51	51	5-25	
3500-P	3500PCS55451X3	102	56	46	5-25	
3500-Q	3500QCS30301X3	61	31	31	5-25	
3500-Q	3500QCS30351X3	67	31	36	5-25	
3500-Q	3500QCS30401X3	72	31	41	5-25	
3500-Q	3500QCS30451X3	77	31	46	5-25	
3500-Q	3500QCS30501X3	82	31	51	5-25	

- MODULARE | MODULAR
- DUPLICAZIONE PROTETTA
PROTECTED DUPLICATION

- MODULARE | MODULAR
- DUPLICAZIONE PROTETTA
PROTECTED DUPLICATION


 **SECUREMME®**
SERRATURE DI SICUREZZA

CILINDRO MODULARE
MODULAR CYLINDER

ALTISSIMA SICUREZZA
E MASSIMA PRATICITÀ
HIGH SECURITY
AND MAXIMUM CONVENIENCE

K5



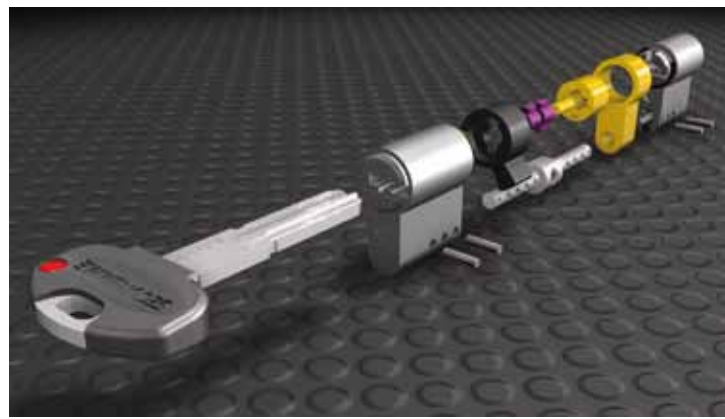

LA SCELTA DEL CILINDRO È IMPORTANTISSIMA!

Securemme propone la nuova linea K5 modulare di altissima sicurezza, con chiave registrata a duplicazione protetta, security card per la duplicazione autorizzata delle chiavi, elevata resistenza al bumping e oltre 1 milione di combinazioni.

MODULARITÀ

- La caratteristica del cilindro K5 è la modularità che permette di comporre la lunghezza e il modello desiderato assemblando i distanziali da 5/10/20 mm al corpo da 30 mm.

- K5 si distingue per la facilità nelle esecuzioni KA e gruppi masterizzati MK, GMK e GGMK mantenendo la sicurezza e la comodità di gestire con un'unica chiave più ingressi con combinazioni diverse. Utilizzando una sola chiave si possono aprire il cancello d'entrata, la porta condominiale, la porta di casa, il locale caldaia ecc.

CARATTERISTICHE TECNICHE

- Oltre 1 milione di combinazioni
- Chiavi piatte reversibili in alpaca. 1 chiave da cantiere (*) e 3/5 chiavi sigillate definitive;
- Security card
- Chiave registrata a duplicazione protetta
- Cifratura combinata: perni ed elementi basculanti attivi
- Profilo personalizzato su richiesta
- Barra di rinforzo in acciaio inox che protegge il corpo del cilindro
- Perni antipicking
- Spine antitrapano fronte e retro
- (*) Sistema da cantiere: una chiave può essere utilizzata in fase di cantiere e a lavori ultimati inserendo una delle chiavi definitive, si rende inutilizzabile la precedente
- Finitura cromo satinata

THE CHOICE OF CYLINDER IS VERY IMPORTANT!

Securemme offers the new modular high security line K5, registered key with protected duplication, security card for authorized keys duplication, high resistance against bumping and over 1 million combinations.

MODULAR FEATURE

- The main feature of K5 is the modular system that allows the arrangement of the requested cylinder model and length by assembling 5/10/20 mm thicknesses to the main body of 30 mm.

- K5 stands out for its easy KA and master MK, GMK, GGMK groups executions, keeping security and comfort of opening more entries with different combinations by one only key. For example you can open gate, main entrance, apartment door and boiler room by the same key.

TECHNICAL FEATURES

- Over 1 million combinations
- Flat reversible silver nickel keys. 1 site key (*) + 3/5 definitive keys
- Security card
- Registered key with protected duplication
- Combined key coding
- Pins and balancing active elements
- Personalized profile on request
- Stainless steel reinforcement bar that protects the cylinder body
- Antipicking pins
- Frontal and back antidrilling pins
- (*) Construction key system: use of the first key (site key) during workings. When workings are finished you insert the definitive key and the site one is not operative anymore
- Chromo satin finishing



Security card per la duplicazione autorizzata delle chiavi K5 Securemme
Security card for authorized duplication of K5 Securemme keys

I VANTAGGI DEL KIT "VALIGETTA" art. VA3500XX4525

Facilità di montaggio direttamente sul posto dell'intervento senza inutili costi di sopralluogo. Con gli articoli in dotazione si possono comporre tutti i modelli **chiave - chiave (C), doppia funzione/ frizionato (D), mezzo cilindro (M), pomolo (P), predisposizione pomolo (Q) e tutte le misure richieste riducendo le scorte di magazzino.**




THE ADVANTAGES OF KIT "VALIGETTA" art. VA3500XX4525


Easy assembly even directly on place thus avoiding useless inspection costs. The standards components included in supply allow the assembly of all models **key - Key (C), double function (D), half Cylinder (M), Knob (P), knob predisposition (Q) and all measures requested thus reducing the stock.**

ESEMPI DI MONTAGGIO EXAMPLES OF ASSEMBLY


LINEA: K5 C

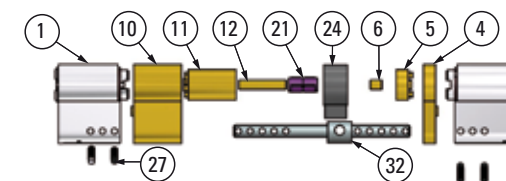


LINEA: K5 D (frizionato)

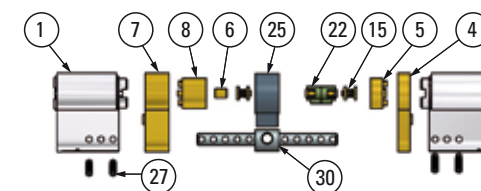


LINEA: K5 M

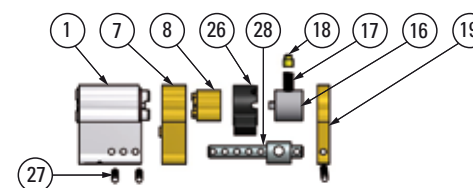









LINEA: K5 P

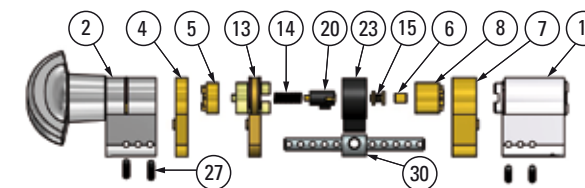

LINEA: K5 Q

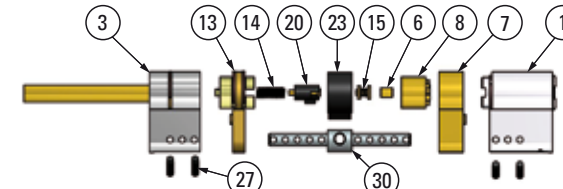

BARRE DI ALLUNGAMENTO EXTENSION STEEL BAR

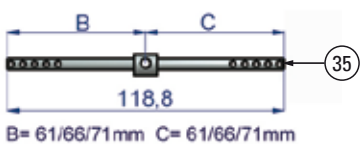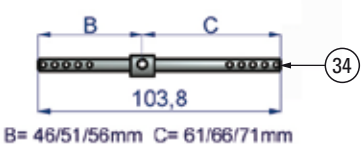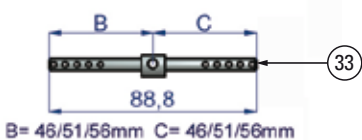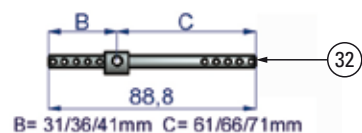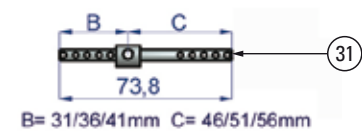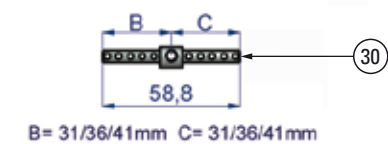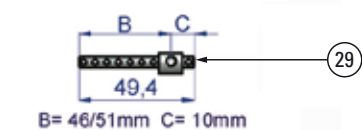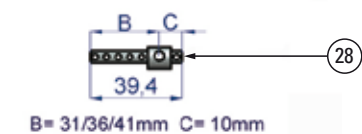

LEGENDA LEGEND

- 1 3500UCS27271X3
- 2 3500PCS21XX
- 3 3500QCS21XX
- 4 DS3500COT05XX
- 5 DR3500CZA05XX
- 6 DT3500COT05XX
- 7 DS3500COT10XX
- 8 DR3500CZA10XX
- 9 DT3500COT10XX
- 10 DS3500COT20XX
- 11 DR3500CZA20XX
- 12 DT3500COT20XX
- 13 DS3500POT05XX
- 14 ML3500PZB11XX
- 15 DT3500POT05XX
- 16 DR3500MOT10XX
- 17 ML3500MZB11XX
- 18 SP3500MOT05XX
- 19 DS3500MOT05XX
- 20 IC3500PCN10XX
- 21 IC3500CCN10XX
- 22 IC3500DCN10XX
- 23 CM3500PCN10XX
- 24 CM3500CCN10XX
- 25 CM3500DCN10XX
- 26 CM3500MCN10XX
- 27 SP3500CAIXXXX
- 28 SB3500MAI3010
- 29 SB3500MAI4010
- 30 SB3500CAI3030
- 31 SB3500CAI3045
- 32 SB3500CAI3060
- 33 SB3500CAI4545
- 34 SB3500CAI4560
- 35 SB3500CAI6060